


FLUSH TRIM ROUTING AGGREGATE

Aggregate for routing of glued-on edge banding flush with board with probing function

Board machining: After the edge banding has been glued on, the aggregate routes the protruding part of the edge banding using the integrated probing function so that the banding is flush with the board top and bottom surfaces.

Technical Specifications

Max. input speed:	10,000 rpm
Max. output speed:	10,000 rpm
Gear ratio:	1 : 1
Max. torque:	6 Nm
Permissible operating temperature:	max. 85°C
Positioning of torque arm with respect to tool:	4 x 90°
Machining angle:	90°
Number of tool outputs:	2 / fixed
Lubrication:	Grease / Lifetime lubrication

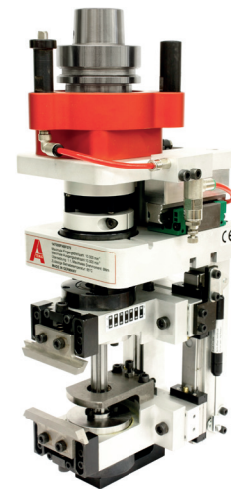

CHISEL MORTISER AGGREGATE

Drilling of square holes through simultaneous drilling and mortising

- Production of square recesses in stair stringers for connecting and positioning treads in stringers
- Notching of internal corners

Technical Specifications

Max. input speed:	3,000 rpm
Max. output speed:	3,000 rpm
Gear ratio:	1 : 1
Max. torque:	20 Nm
Permissible operating temperature:	max. 85°C
Positioning of torque arm with respect to tool:	3 x 120°
Machining angle:	Horizontal or vertical
Number of tool outputs:	1 / fixed
Lubrication:	Grease / Lifetime lubrication

